


(8CH * 1L)

EXTERNAL DIMENSION

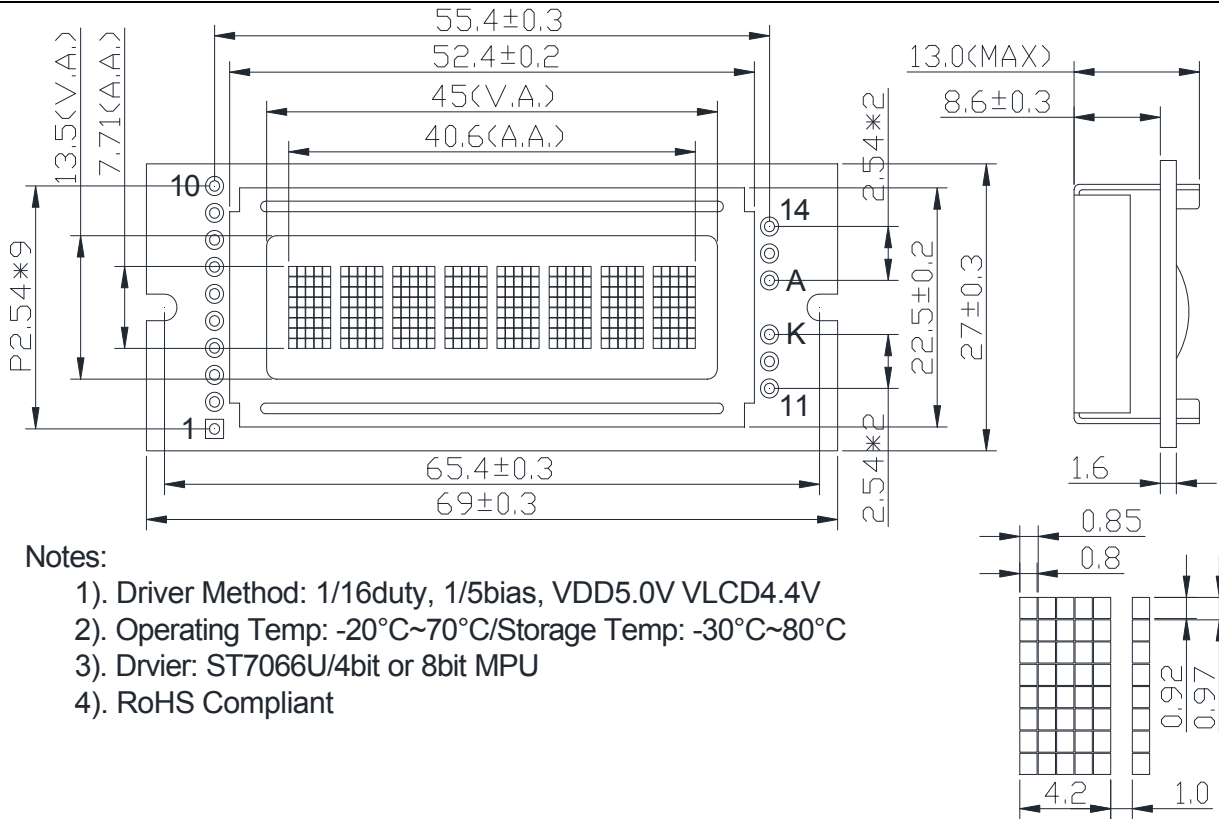

Notes:

- 1). Driver Method: 1/16duty, 1/5bias, VDD5.0V VLCD4.4V
- 2). Operating Temp: -20°C~70°C/Storage Temp: -30°C~80°C
- 3). Driver: ST7066U/4bit or 8bit MPU
- 4). RoHS Compliant

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB4	DB5
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB6	DB7	DB0	DB1	DB2	DB3	LED+	LED-

BLOCK DIAGRAM

