


(24CH * 2L)

EXTERNAL DIMENSION

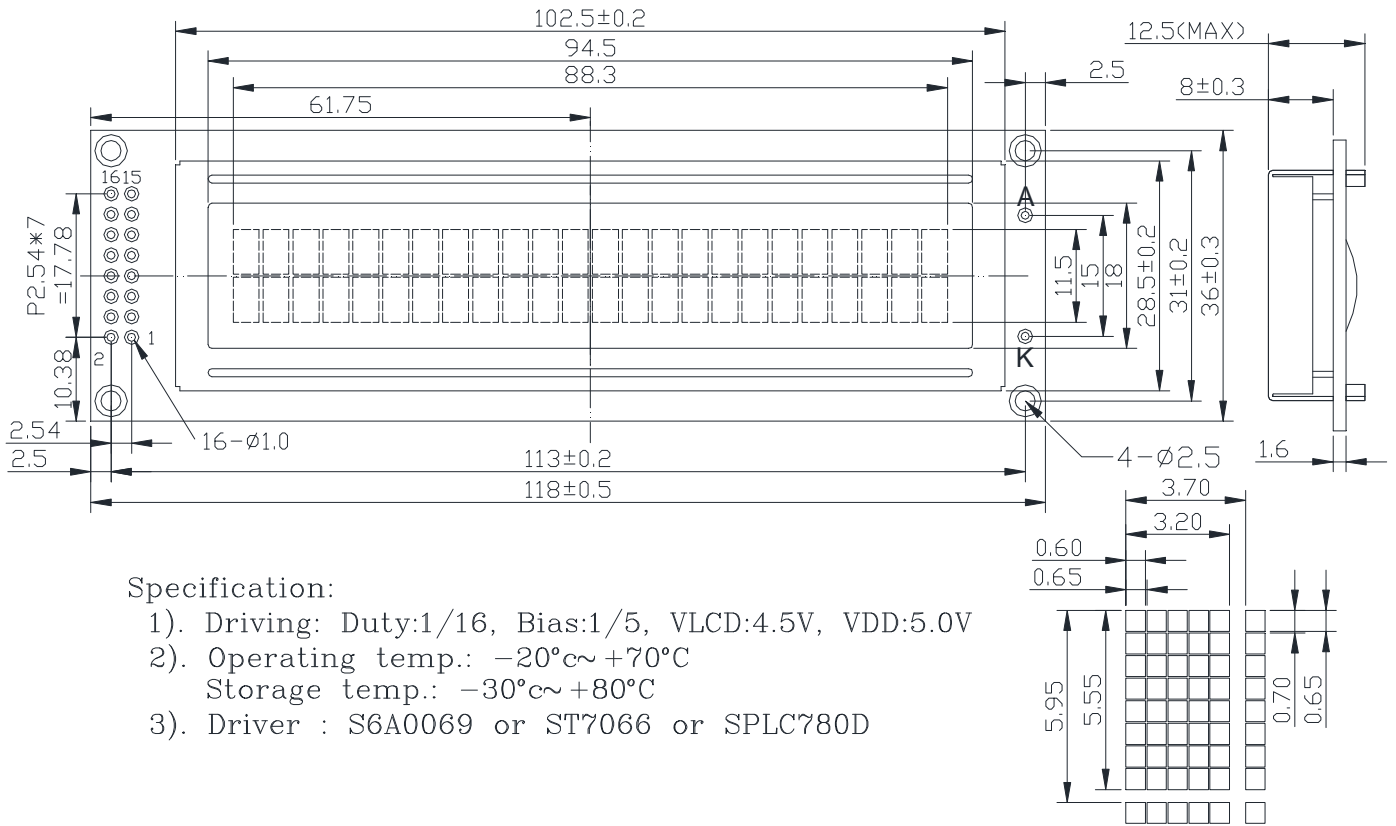

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 3). Driver : S6A0069 or ST7066 or SPLC780D

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

BLOCK DIAGRAM

