(40CH * 4L)

EXTERNAL DIMENSION

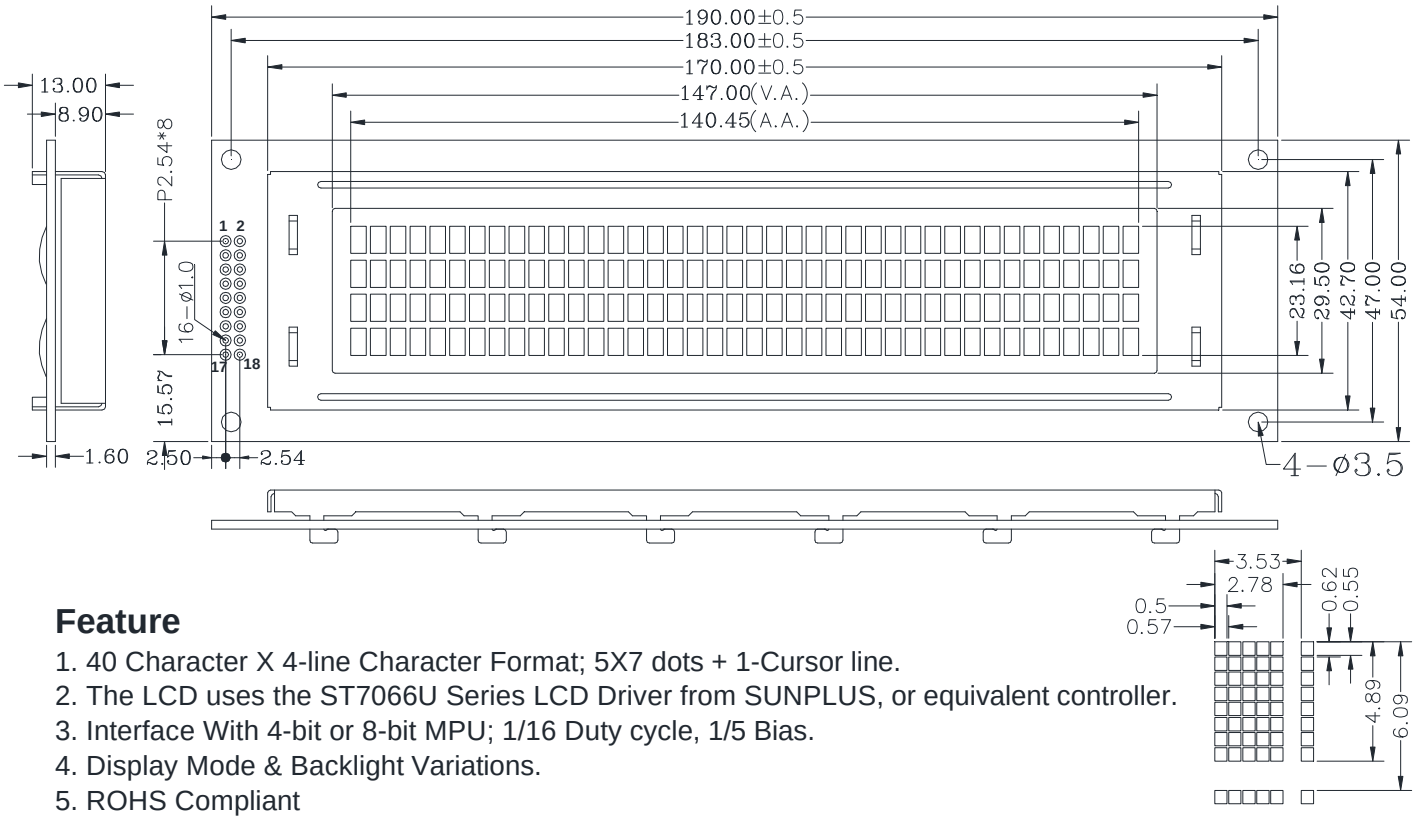

Feature

1. 40 Character X 4-line Character Format; 5X7 dots + 1-Cursor line.
2. The LCD uses the ST7066U Series LCD Driver from SUNPLUS, or equivalent controller.
3. Interface With 4-bit or 8-bit MPU; 1/16 Duty cycle, 1/5 Bias.
4. Display Mode & Backlight Variations.
5. ROHS Compliant

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E1
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	R/W	RS	V0	VSS	VCC	E2	NC	LED+	LED-
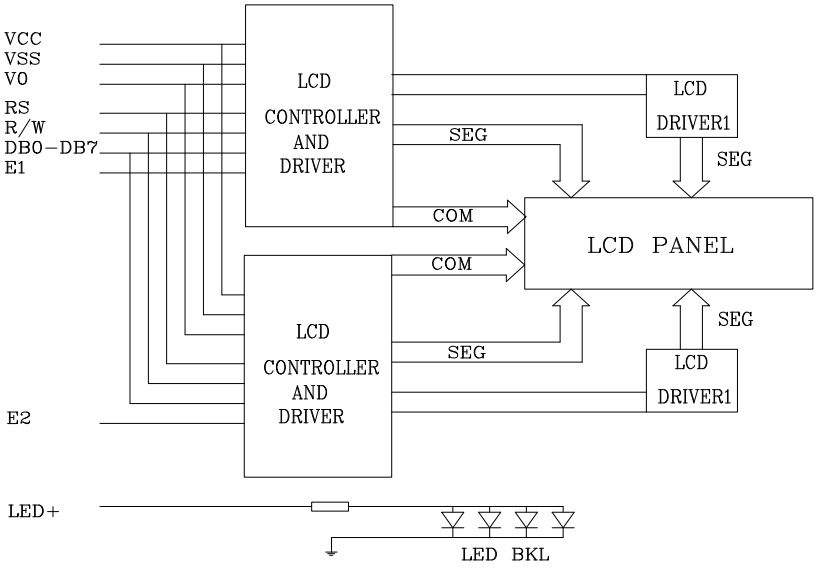
BLOCK DIAGRAM